


# SDI/HDMI/YPBPR/VGA/AV SMART CAPTURE BOX

## Quick Start Guide V2.0


### Product definition

No.		
1	12V/1A	
2	HDMI Output	UP TO 1080p60hz
3	HDMI Input	HDMI 1.4 UP TO 4K30hz
4	MMI Input (AV/VGA/YPBPR)	MMI cable for AV/VGA/YPBPR
5	Micro usb2.0 ( USB to PC)	Pc Mode
6	USB2.0 and SD CARD	U disk,SD or hard disk (512G or 8TB)
7	Line Out and Line in 3.5mm	Headphones, speakers, etc.
8	Mic In 3.5mm	Microphone, audio input
9	Infrared reception	
10	SDI	3G/HD/SD-SDI
11	SDI/HDMI/AV/VGA/YPBPR	Signal LED
12	Snapshot	Snapshot LED
13	REC	Recroding LED
14	Snapshot	
15	SDI/HDMI/AV/YPBPR/VGA	Source switching
16	Record/Stop	
	POWER	Shutdown button(press 8 sec)

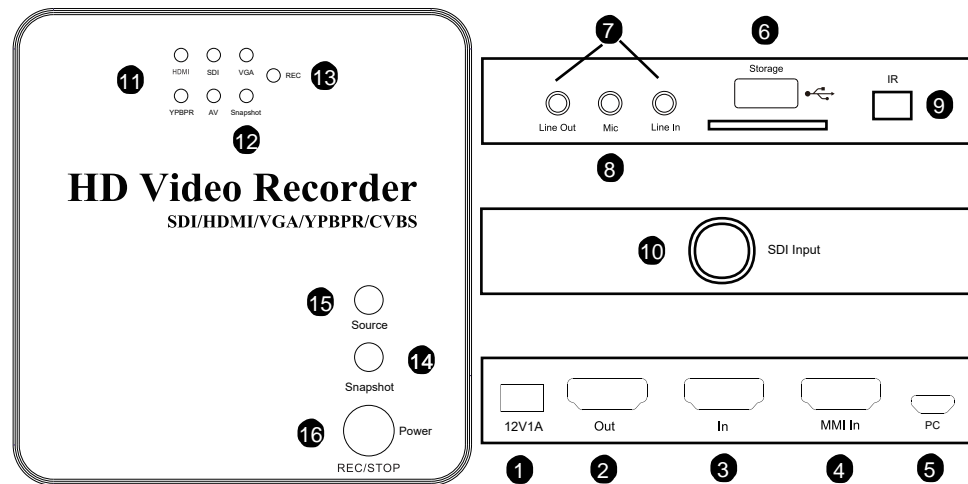


### HDMI / SDI Input Resolution:

HDMI Input:	3840x2160 (30p)
HDMI Output:	1920x1080 (60p)
Recording:	1920x1080 (60p)
PC software Recording:	1920x1080 (60p)

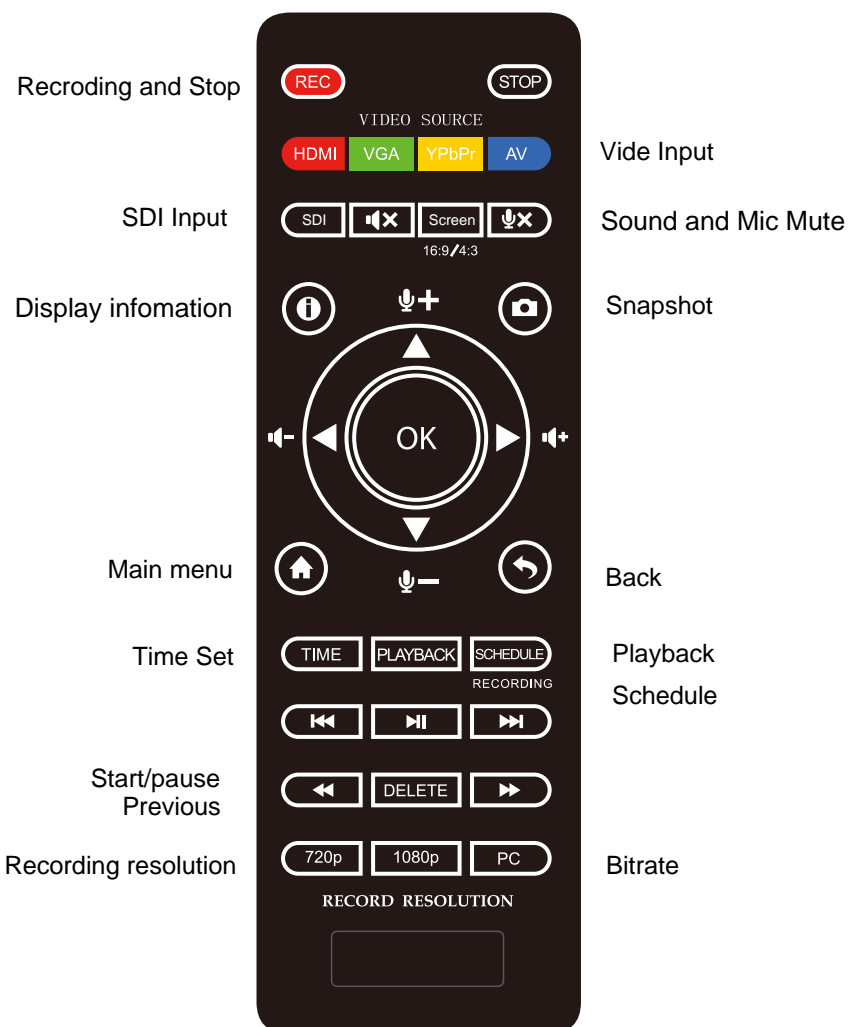

## PC MODE:

1. The first step is to install the uxplayer plus on the CD
2. The serial number is behind the disc package
3. This product can be used in addition to our software, you can also use OBS, Xsplit, etc.
4. When using the PC function, the storage device is a computer (not stored in the U disk or hard disk)

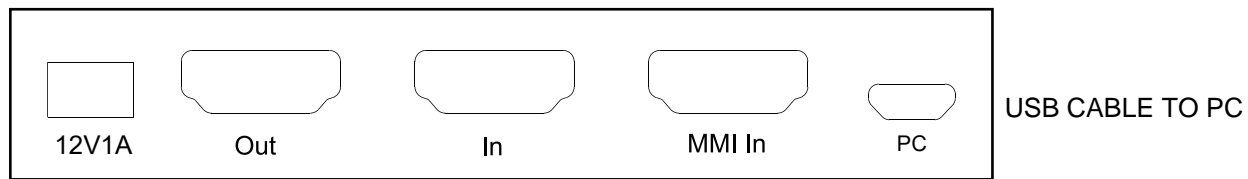

## LED description:

LED	
REC (Red Light)	Flashing indicates recording
Signal (Green Light)	HDMI/SDI/VGA/YPBPR/AV
HDMI	Signal (Green Light)
SDI	Signal (Green Light)
VGA	Signal (Green Light)
YPBPR	Signal (Green Light)
AV	Signal (Green Light)
Snapshot	Blue Light



## External storage device considerations:

1. U disk and SD CARD maximum 512G (fat32/exfat/ntfs/ etc. format)
2. Maximum 8TB hard disk(fat32/ntfs/exfat/ssd/MBR etc

## Other notes:

1. Please use the "TIME" button for the first time to set the system time
2. After the recording is complete, wait until the light off and then remove the storage device

If you have any questions please contact customer service.